

12" DEWATERING PUMP

These pumps are suitable for dewatering, over pumping sewage, drainage pumping, irrigation and chiller plants. The suction and discharge is 300 x 300 mm with closed type impeller with mechanical seal. (Open type impeller also available).

Priming Tank is made of Mild Steel/ Stainless Steel (Aluminium also available) and the internal parts are of Teflon, Stainless steel which increase the life and efficiency of the pump. Volute Casing is cast iron (Stainless Steel also available) and it is designed in such a way that the shape helps to give better discharge. Shaft, Impeller, Stuffing box and all other internal parts are made by stainless steel.

We are manufacturing pumps as per the demand of the customer requirements: Open Impeller pumps, Electric motor driven pumps, with 2/4 wheel types, skid mounted types and MOC according to customer requirements.




Features and Benefits

- Easy Maintenance normally limited to checking oil levels and filters.
- This dewatering pump used for handling sewage, slurries, and liquids with solids up to 2.0" in diameter.
- Dry-running high pressure liquid bath Double mechanical seal with high abrasion resistant solid silicon carbide faces.
- A centrifugal pump with Dri- Prime system coupled to a diesel engine or electric motor.
- Kirloskar HA 694 engine can be coupled with the pump. Electric motor is also an option.

Pump Specifications

Pump Make	RACORS
Pump Model	Racors 300
Vacuum Capacity	70 cfm (Double Vacuum motor)
Max. Water Flow	1250 m ³ /hr
Suction x Discharge	12" x 12" (300 mm x 300 mm)
Max. Head	30 mtr.
Max. Suction lift	9 mtr.
Max. Solid handling	2"

Performance Curve

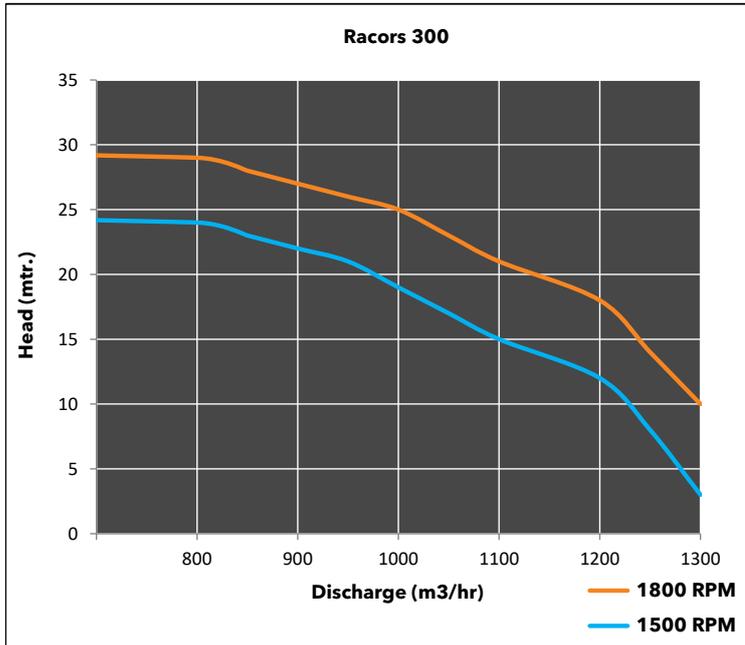

Engine Specifications

Engine	KIRLOSKAR HA 694, 6 Cylinder, Air cooled Diesel Engine
Capacity	78 HP
Speed	1800 RPM
Starting	Electric with starter Motor, Charging Alternator, Oil Bath Air cleaner, fuel Injection Pump, Oil filter, Engine mounted Exhaust Silencer, Manual Shut off, Wire Harness & Starting Panel

Material of Construction

Volute Housing	High Grade cast Iron
Pump Shaft	Stainless steel, SS - 304
Impeller	Stainless Steel, SS - 304
Stuffing Box	High Grade cast Iron with Double Mechanical seal immersed in oil bath for better efficiency & longer durability
Priming Tank	Mild Steel
Mounting	Portable Four wheel chassis with built in fuel tank having a fuel Capacity of 220 liters.

Weight & Dimensions

Weight without engine	700 kg
Weight with engine	1200 kg
Length x width x height(cm)	214 x 213 x 153cm
20 feet container	2 nos
40 feet container	4 nos